



**INSTRUMENT
APPROACH CHART - ICAO**

ELEV 391 FT
HEIGHTS RELATED TO
THR RWY 24 ELEV 367 FT

**ILS Z or LOC Z RWY 24
TAMPERE-PIRKKALA AERODROME
TAMPERE, FINLAND**

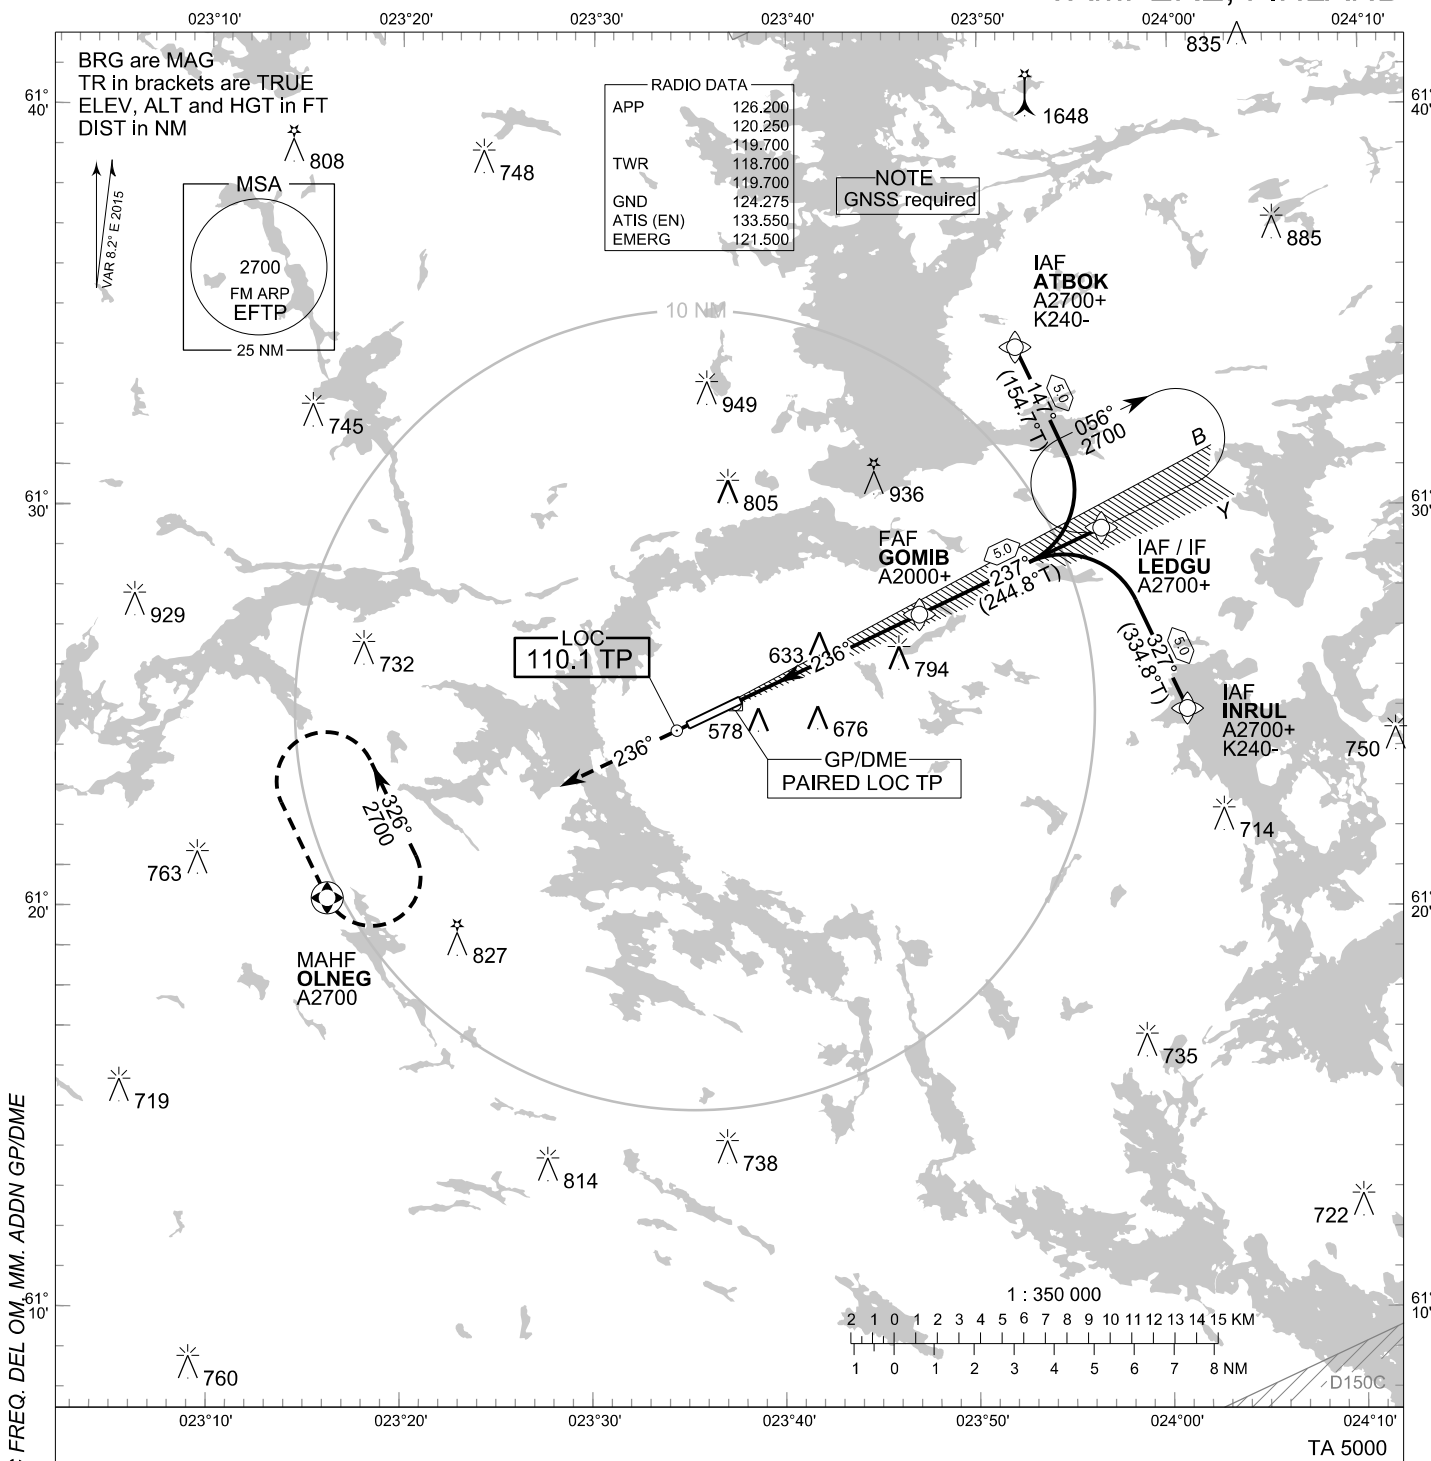

CHG: MAPt, OCA (H), LOC, FREQ. DEL OM, MM, ADDN GP/DME

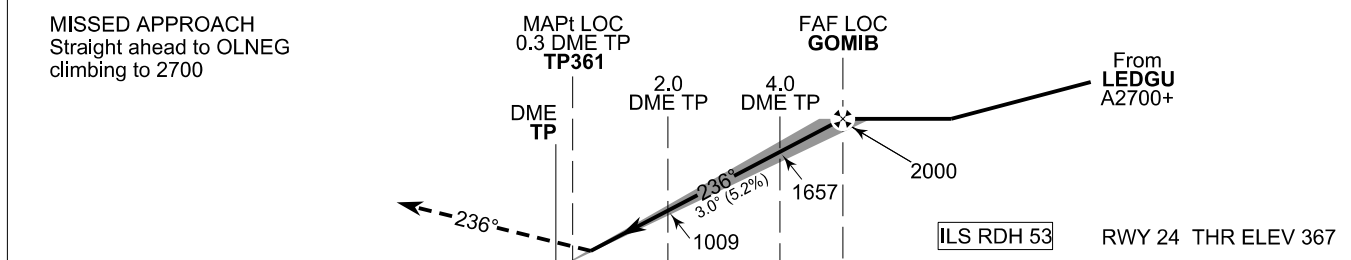

OCA (H)	A	B	C	D
ILS CAT I	524 (157)	534 (167)	546 (179)	560 (193)
LOC	880 (520)			
Circling	880 (490)	980 (580)	1190 (800)	1200 (810)

	kt	90	100	120	140	160
FAF - MAPt 4.8 NM	min:sec	3:13	2:54	2:25	2:04	1:49
Rate of descent	ft/min	480	530	640	740	850

Timing not authorized for defining the MAPt

EFTP ILS Z or LOC Z RWY 24										
PROC ID NAV SPEC	SEQ NR	P/T	WPT			MAG GEO TR	DIST NM	Turn Direction	Constraints	
			ID	Type	Flyover				LVL	Speed
I24 INRUL RNP APCH	005	IF	INRUL	IAF	-	327°	5.0	L	A2700+	K240-
	010	TF	LEDGU	IF	-	334.8°T			A2700+	
	020	TF	GOMIB	FAF LOC	-	237° 244.8°T	5.0	A2000+		
	030	TF	TP361	MAPt LOC	Y	236°	-			
	040	CA	-	-	-	244.2°T	-	A900+		
	050	DF	OLNEG	MAHF	Y	-	-	A2700		

EFTP ILS Z or LOC Z RWY 24										
PROC ID NAV SPEC	SEQ NR	P/T	WPT			MAG GEO TR	DIST NM	Turn Direction	Constraints	
			ID	Type	Flyover				LVL	Speed
I24 LEDGU RNP APCH	010	IF	LEDGU	IAF/IF	-	237°	5.0		A2700+	
	020	TF	GOMIB	FAF LOC	-	244.8°T			A2000+	
	030	TF	TP361	MAPt LOC	Y	236°	-			
	040	CA	-	-	-	244.2°T	-	A900+		
	050	DF	OLNEG	MAHF	Y	-	-	A2700		

EFTP ILS Z or LOC Z RWY 24										
PROC ID NAV SPEC	SEQ NR	P/T	WPT			MAG GEO TR	DIST NM	Turn Direction	Constraints	
			ID	Type	Flyover				LVL	Speed
I24 ATBOK RNP APCH	005	IF	ATBOK	IAF	-	147°	5.0	R	A2700+	K240-
	010	TF	LEDGU	IF	-	154.7°T			A2700+	
	020	TF	GOMIB	FAF LOC	-	237° 244.8°T	5.0	A2000+		
	030	TF	TP361	MAPt LOC	Y	236°	-			
	040	CA	-	-	-	244.2°T	-	A900+		
	050	DF	OLNEG	MAHF	Y	-	-	A2700		

RNAV Holdings							
ID	INBD TR	INBD MAG	Turn Direction	MAX IAS	MNM HLDG LVL	TIME	DIST NM
LEDGU	244.5°T	236°	Right	230 KT	A2700	1 MIN	-
OLNEG	154.1°T	146°	Left	230 KT	A2700	1 MIN	-

WPT COORD
SEE PAGE EFTP AD 2.15 - 1

FINAL APPROACH PARAMETERS			
LOC Gradient	ILS		RDH
	CAT	GPA	
5.24 % (3.00°)	I	3.00°	53 FT