



STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALT
5000

RNAV^(GNSS) SID RWY 12
OULU AERODROME
OULU, FINLAND

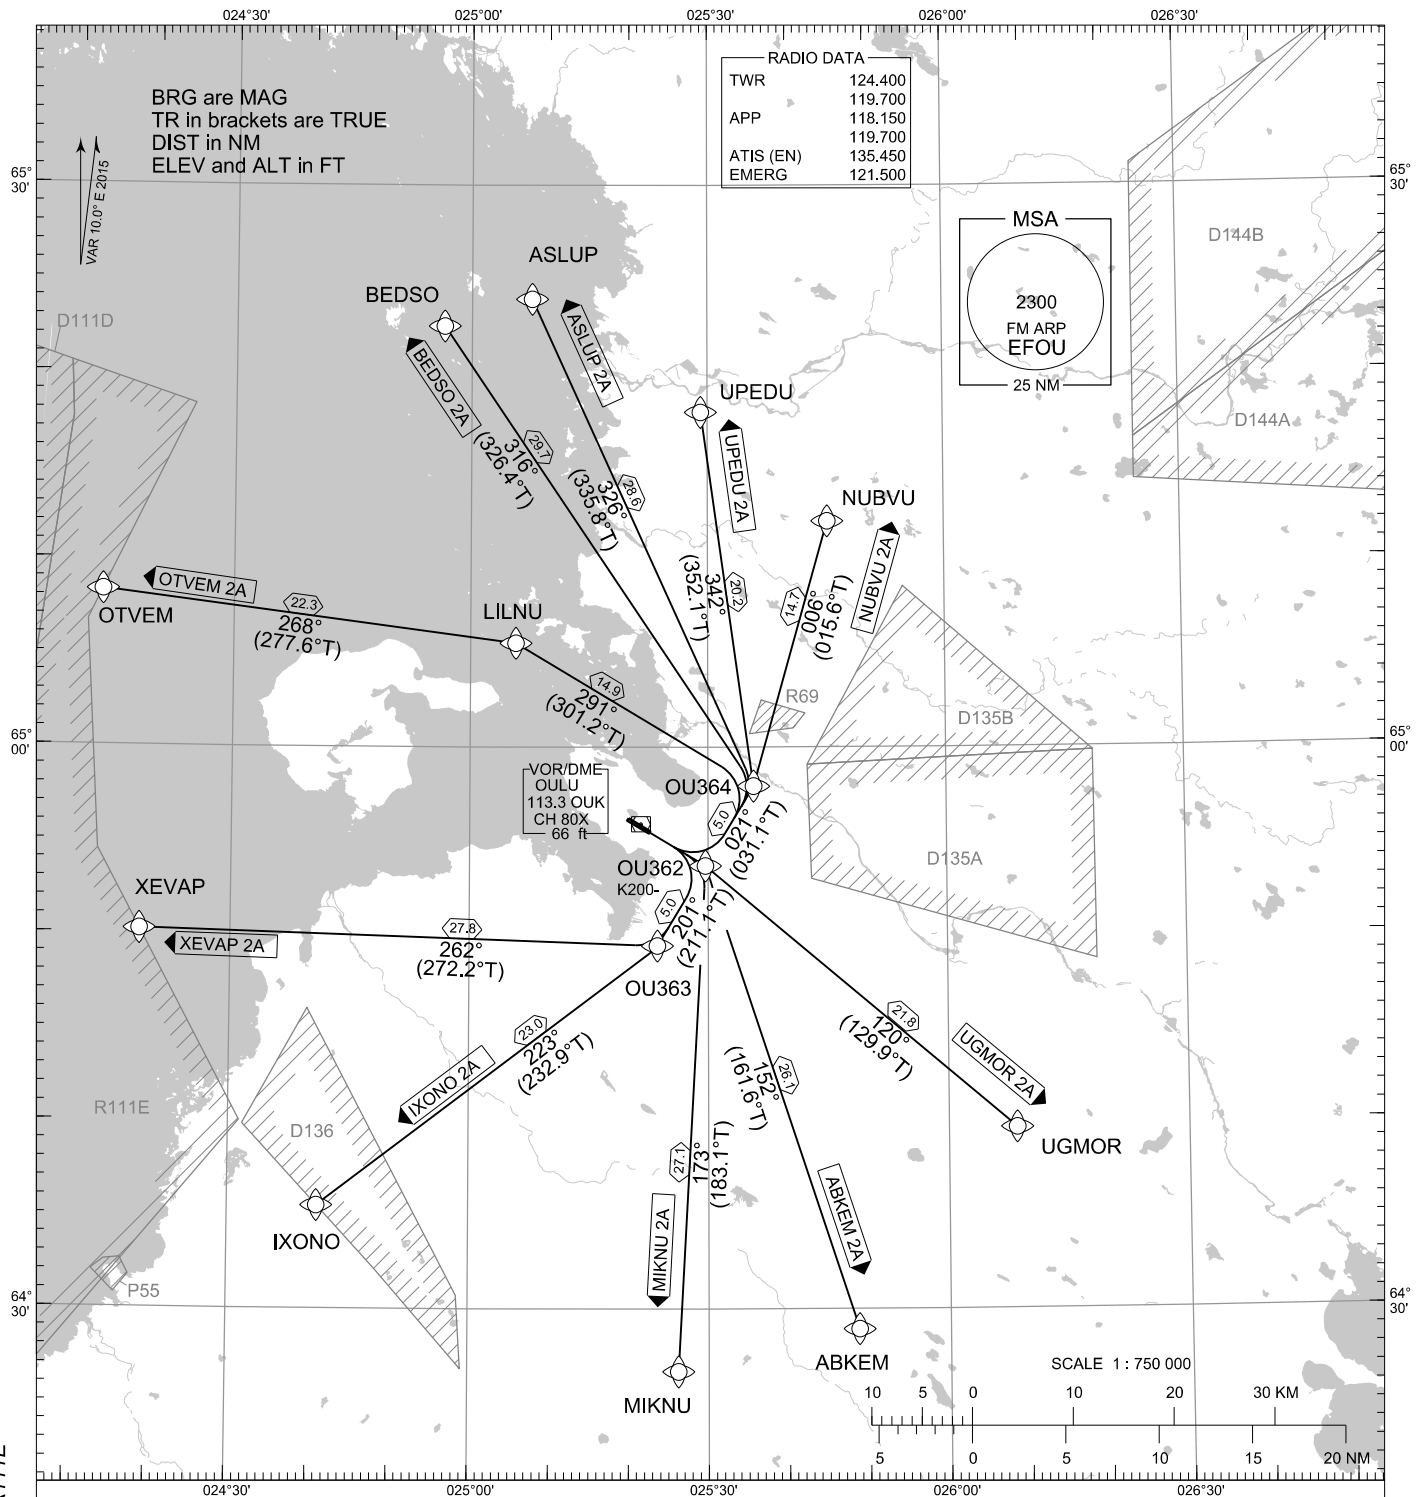

| RADIO DATA | |
|------------|---------|
| TWR | 124.400 |
| APP | 119.700 |
| APP | 118.150 |
| APP | 119.700 |
| ATIS (EN) | 135.450 |
| EMERG | 121.500 |



CHG: ADDN D111D, R111E

RNAV SID RWY 12

ABKEM 2A ASLUP 2A BEDSO 2A IXONO 2A MIKNU 2A NUBVU 2A OTVEM 2A UGMOR 2A UPEDU 2A XEVAP 2A

NAV SPECIFICATION: RNAV 1 OR P-RNAV APPROVAL REQUIRED. OTHERWISE ADVISE ATC

DME/DME OPS: NOT SUPPORTED

ROUTES: RNAV PROC CODING ON THE VERSO OF THE CHART

SQUAWK: WHEN LINING UP SQUAWK THE ASSIGNED CODE

INITIAL CLIMB: MNM TURNING ALT ACCORDING TO RTE CODING. CLOSE-IN OBSTACLES EXIST, SEE EFOU AD 2.10 - 5

NOISE ABATEMENT: AFTER TAKE-OFF CLIMB AS RAPIDLY AS POSSIBLE TO AT LEAST 2000 FT ABOVE AD ELEV
PUBLISHED SID ROUTES ARE ALSO MINIMUM NOISE ROUTINGS

AREA MNM ALT: SEE AMA INDEX, AIP ENR 6.1 - 3

| EFOU RNAV SID RWY 12 | | | | | | | | | | |
|---------------------------------|--------|-----|-------|---------|------|---------|---------|-------------------|-------------|-------|
| RTE NAV SPEC | SEQ NR | P/T | WPT | | MAG | GEO TR | DIST NM | Turn Direction | Constraints | |
| | | | ID | Flyover | | | | | LVL | Speed |
| ABKEM 2A RNAV 1 or P-RNAV | 010 | CA | - | - | 111° | 121.0°T | - | | A440+ | |
| | 020 | DF | OU362 | - | - | - | - | | | K200- |
| | 030 | TF | ABKEM | - | 152° | 161.6°T | 26.1 | | | |
| ASLUP 2A RNAV 1 or P-RNAV | 010 | CA | - | - | 111° | 121.0°T | - | | A440+ | |
| | 020 | DF | OU362 | - | - | - | - | | | K200- |
| | 030 | TF | OU364 | - | 021° | 031.1°T | 5.0 | L | | |
| | 040 | TF | ASLUP | - | 326° | 335.8°T | 28.6 | | | |
| BEDSO 2A RNAV 1 or P-RNAV | 010 | CA | - | - | 111° | 121.0°T | - | | A440+ | |
| | 020 | DF | OU362 | - | - | - | - | | | K200- |
| | 030 | TF | OU364 | - | 021° | 031.1°T | 5.0 | L | | |
| | 040 | TF | BEDSO | - | 316° | 326.4°T | 29.7 | | | |
| IXONO 2A RNAV 1 or P-RNAV | 010 | CA | - | - | 111° | 121.0°T | - | | A440+ | |
| | 020 | DF | OU362 | - | - | - | - | | | K200- |
| | 030 | TF | OU363 | - | 201° | 211.1°T | 5.0 | | | |
| | 040 | TF | IXONO | - | 223° | 232.9°T | 23.0 | | | |
| MIKNU 2A RNAV 1 or P-RNAV | 010 | CA | - | - | 111° | 121.0°T | - | | A440+ | |
| | 020 | DF | OU362 | - | - | - | - | | | K200- |
| | 030 | TF | MIKNU | - | 173° | 183.1°T | 27.1 | | | |
| NUBVU 2A RNAV 1 or P-RNAV | 010 | CA | - | - | 111° | 121.0°T | - | | A440+ | |
| | 020 | DF | OU362 | - | - | - | - | | | K200- |
| | 030 | TF | OU364 | - | 021° | 031.1°T | 5.0 | | | |
| | 040 | TF | NUBVU | - | 006° | 015.6°T | 14.7 | | | |
| OTVEM 2A RNAV 1 or P-RNAV | 010 | CA | - | - | 111° | 121.0°T | - | | A440+ | |
| | 020 | DF | OU362 | - | - | - | - | | | K200- |
| | 030 | TF | OU364 | - | 021° | 031.1°T | 5.0 | L | | |
| | 040 | TF | LILNU | - | 291° | 301.2°T | 14.9 | | | |
| | 050 | TF | OTVEM | - | 268° | 277.6°T | 22.3 | | | |
| UGMOR 2A RNAV 1 or P-RNAV | 010 | CA | - | - | 111° | 121.0°T | - | | A440+ | |
| | 020 | DF | OU362 | - | - | - | - | | | K200- |
| | 030 | TF | UGMOR | - | 120° | 129.9°T | 21.8 | | | |
| UPEDU 2A RNAV 1 or P-RNAV | 010 | CA | - | - | 111° | 121.0°T | - | | A440+ | |
| | 020 | DF | OU362 | - | - | - | - | | | K200- |
| | 030 | TF | OU364 | - | 021° | 031.1°T | 5.0 | L | | |
| | 040 | TF | UPEDU | - | 342° | 352.1°T | 20.2 | | | |
| XEVAP 2A RNAV 1 or P-RNAV | 010 | CA | - | - | 111° | 121.0°T | - | | A440+ | |
| | 020 | DF | OU362 | - | - | - | - | | | K200- |
| | 030 | TF | OU363 | - | 201° | 211.1°T | 5.0 | R | | |
| | 040 | TF | XEVAP | - | 262° | 272.2°T | 27.8 | | | |

WPT COORD

SEE PAGE EFOU AD 2.15 - 1